
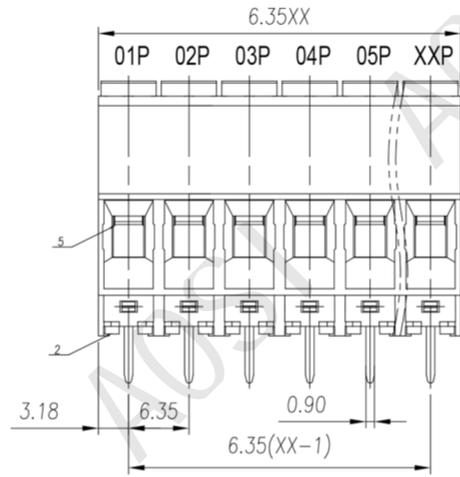
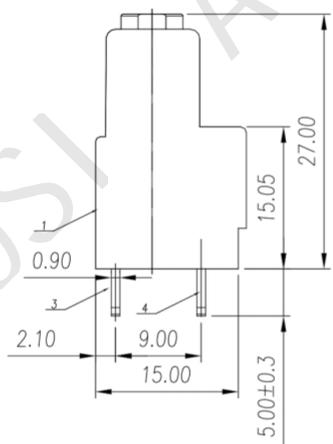
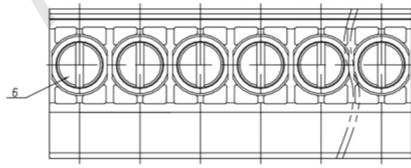


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

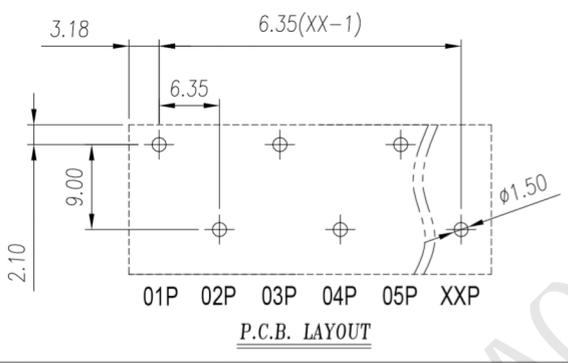

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	600V/30A	600V/30A	600V/5A
	过压类别 (Overvoltage Category)	III/3	III/2	III/2
	/污染等级 (Pollution Degree)			
IEC	额定电器参数 (Rated Electrical Parameters)	800V/41A	1000V/41A	1000V/41A
	压线范围(Wire Range)	24-10		
	工频耐压(Frequency Voltage)	AC 2500V		
	冲击耐压(Rated Surge Voltage)	8KV		
	绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above		
	接触电阻(Contact Resistance)	≤8mΩ		
	剥线长度(String Length)	8mm		
	工作温度(Temperature)	-40° C--+105° C		
	额定扭矩(Rated torque)	0.5N.m		
	材质和电镀(Material and plating)			
	绝缘材质(Housing)	PA66		
	导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)		

产品命名编码:
(Product Number Code):

FET4-XX-635-09-YY



1:绿色(Green)	7:透明色 (Transparent)
2:蓝色(Blue)	8:白色(White)
3:黑色(Black)	9:黄色(Yellow)
4:灰色(Grey)	Y:多种颜色 (Mixed color)
5:橙色(Orange)	
6:红色(Red)	

P=6.35mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	12.70	19.05	25.40	31.75	38.10				
B	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L									
B	63.50	69.85	76.20	82.55	88.90	95.25	101.60	107.95	114.30

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD		公差范围(Tolerance Range)
型号(Type): FET4-XX-635-09-YY		150~ ±1.50
核准(Approval):		60~150 ±1.00
图号(Drawing NO.):		30~60 ±0.60
核审(Audit):		6~30 ±0.40
单位(Units):mm		0~6 ±0.25
页码(Page):1/1		角度 X ±2°
设计(Design):		(Angle) XX ±1°
比例(Scale):FULL		版次(Version):T0