
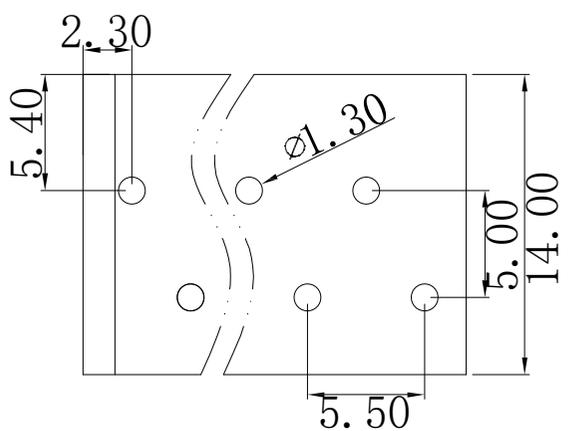
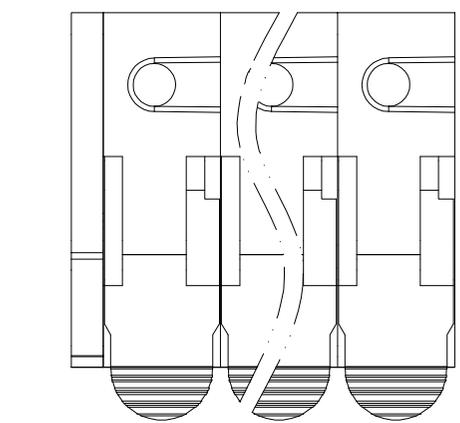
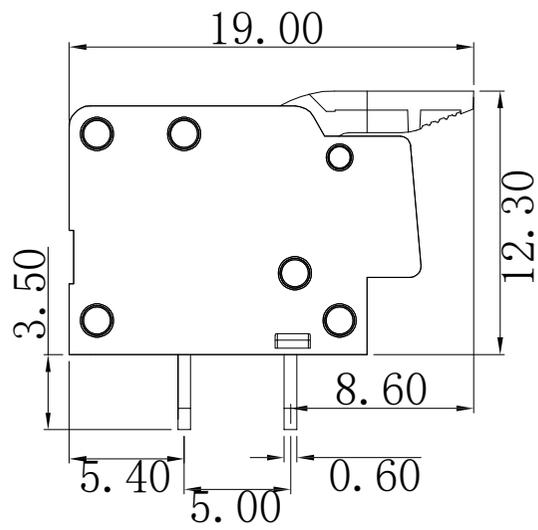



版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

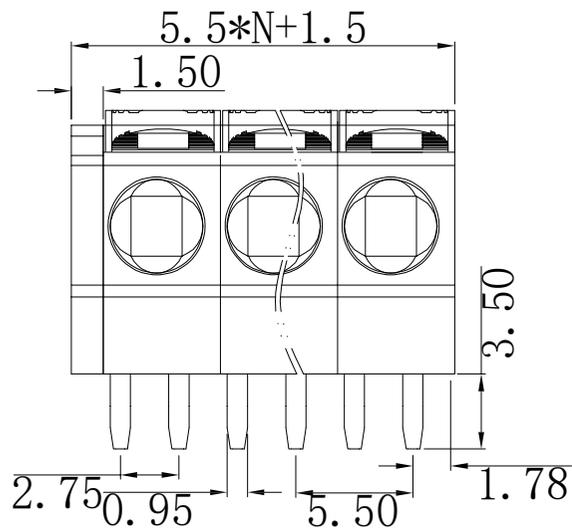

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/20A	300V/20A	450V/32A
IEC	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	450V/32A	450V/32A	450V/32A
压线范围(Wire Range)		22-12AWG 0.34-4.0mm ²		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		10-11mm		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		红铜, 镀锡(Red brass Dumb tin)		
/		/		

产品命名编码:
(Product Number Code):

FS2.5-XX-550-06T-YY

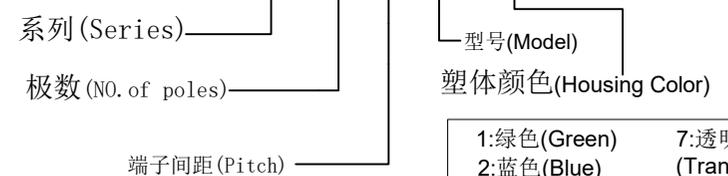

- | | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色
(Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色
(Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=5.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	12.50	18.00	23.50	29.00	34.50	40.00	45.50	51.00	56.50	62.00	67.50	73.00
B	5.50	11.00	16.50	22.00	27.50	33.00	38.50	44.00	49.50	55.00	60.50	66.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	78.50	84.00	89.50	95.00	100.50	106.00	111.50	117.00	122.50	128.00	133.50	
B	71.50	77.00	82.50	88.00	93.50	99.00	104.50	110.00	115.00			

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FS2.5-XX-550-06T-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度(Angle) X.X	±2°
	单位(Units):mm	±1°
设计(Design):	图号(Drawing NO.):	页码(Page):1/1
	比例(Scale):FULL	版次(Version):T0