
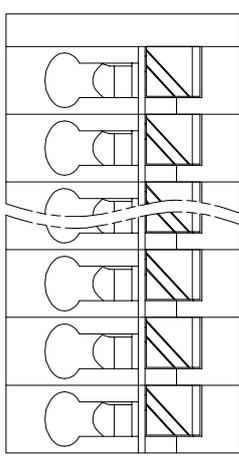
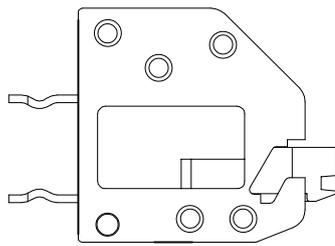
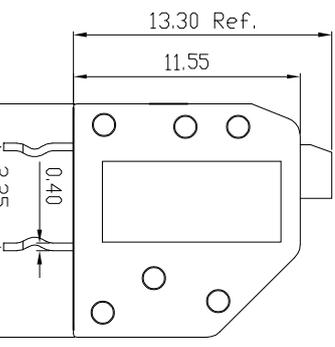
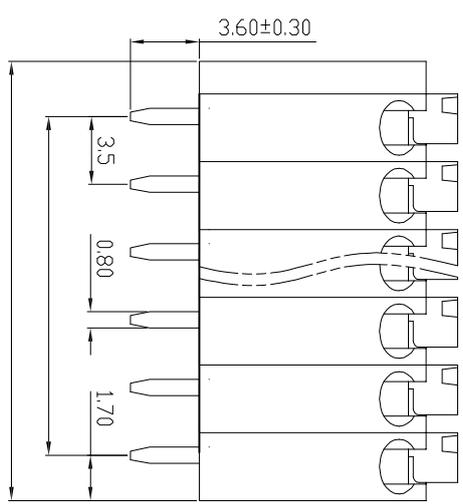



版本 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

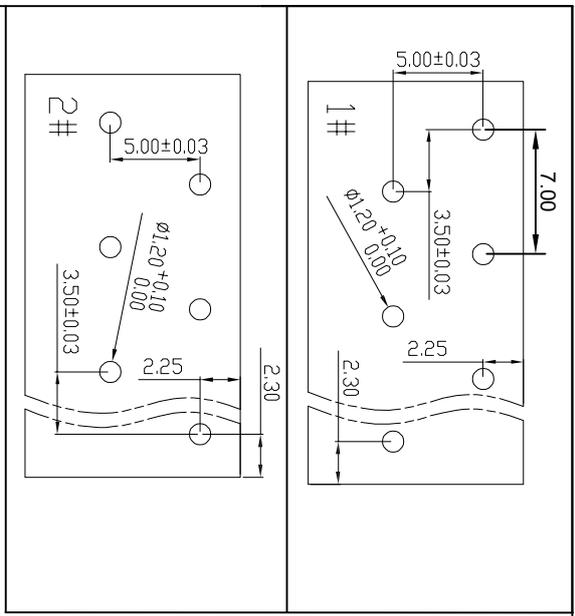

### 技术参数 (Technical Data)

应用组别(Use group)	B	C	D
额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
过压类别(Overvoltage Category)	III/3	III/2	III/2
/污染等级(Pollution Degree)			
额定电器参数 (Rated Electrical Parameters)	300V/8A	320V/10A	320V/10A
压线范围(Wire Range)		22~16AWG	
工频耐压(Frequency Voltage)		AC 1600V	
冲击耐压(Rated Surge Voltage)		4000V	
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above	
接触电阻(Contact Resistance)		≤20mΩ	
剥线长度(String Length)		9mm	
工作温度(Temperature)		-40° C~105° C	
额定扭矩(Rated torque)			
材质和电镀(Material and plating)	PA66 UL94V-0		
绝缘材质(Housing)	铜合金, 镀锡(Copper alloy, Sn plated)		
导体材料(Contact)	/		

### 产品命名编码: (Product Number Code):

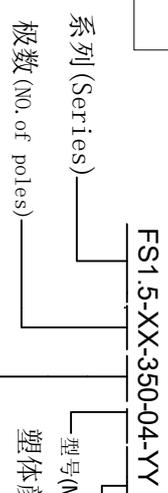

FS1.5-XX-350-04-YY

- 1:绿色(Green)
- 2:蓝色(Blue)
- 3:黑色(Black)
- 4:灰色(Grey)
- 5:橙色(Orange)
- 6:红色(Red)
- 7:透明色 (Transparent)
- 8:白色(White)
- 9:黄色(Yellow)
- Y:多种颜色 (Mixed color)

P=3.50mm, N为孔位数(N for hole digits), 有效位数为 (Significant Digits): 02p~24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	8.50	12.00	15.50	19.00	22.50	26.00	29.50	33.00	36.50	40.00	43.50	47.00
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	50.50	54.00	57.50	61.00	64.50	68.00	71.50	75.00	78.50	82.00	85.50	
B	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	



东莞市澳新电子有限公司  
DONGGUAN AOSI ELECTRONICS CO., LTD.

型号 (Type): FS1.5-XX-350-04-YY

核准 (Approval): 图号 (Drawing NO.):

核审 (Audit): 单位 (Units): mm 页码 (Page): 1/1

设计 (Design): 比例 (Scale): FULL

公差范围 (Tolerance Range)	150~	±1.50
	60~150	±1.00
	30~60	±0.60
	6~30	±0.40
	0~6	±0.25
角度 (Angle)	X	±2°
	X.X	±1°

版次 (Version): 1/0