


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

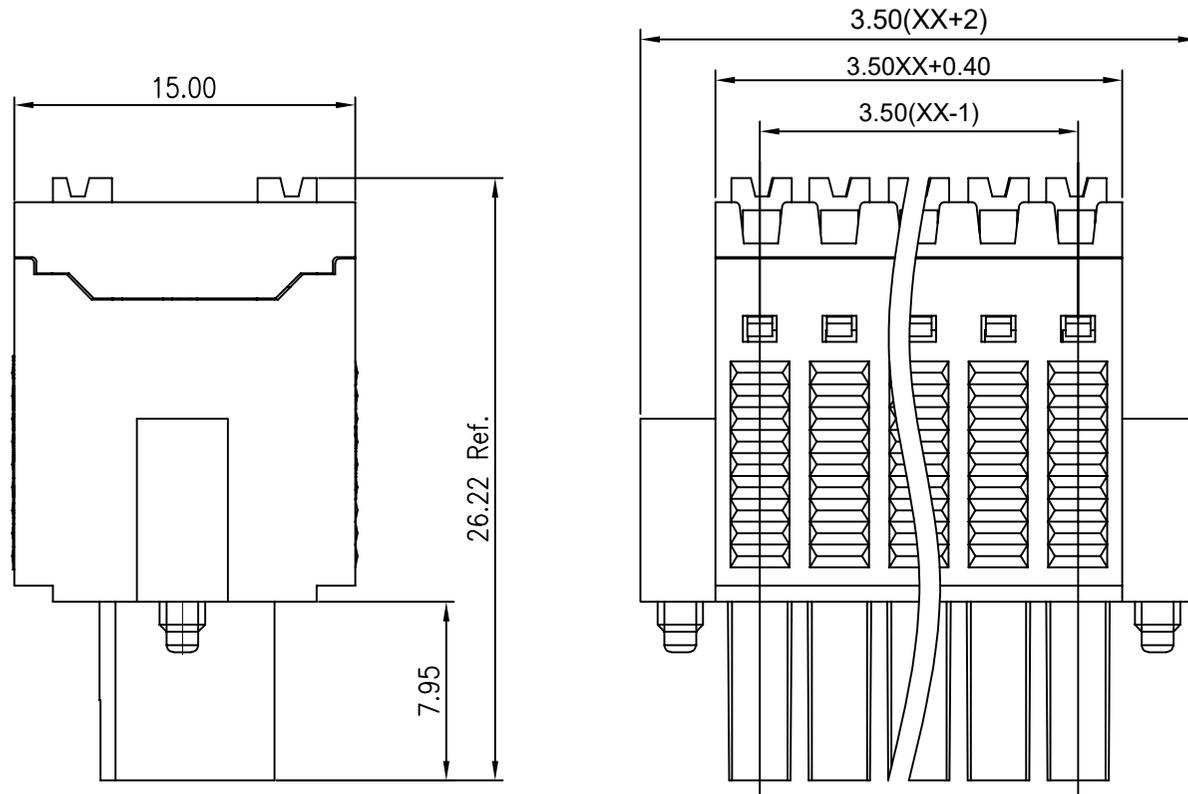

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/10A	50V/10A	300V/10A
	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	II/2
IEC	额定电器参数 (Rated Electrical Parameters)	160V/13.4A	160V/13.4A	320V/13.4A
	压线范围(Wire Range)	26~16AWG 0.2~1.5mm ²		
	工频耐压(Frequency Voltage)	AC 1600V		
	冲击耐压(Rated Surge Voltage)	2500V		
	绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
	接触电阻(Contact Resistance)	≤20mΩ		
	剥线长度(String Length)	10~11 (mm)		
	工作温度(Temperature)	-40° C~+105° C		
	额定扭矩(Rated torque)	/		
材质和电镀 (Material and plating)				
	绝缘材质(Housing)	PA66		
	导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)		
	/	/		

产品命名编码:
(Product Number Code):

FPS1.5-XX-350-27M-YY


系列 (Series) ———— 型号 (Model)
极数 (NO. of poles) ———— 塑体颜色 (Housing Color)

端子间距 (Pitch) ————

- | | |
|--------------|----------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=3.50mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50
B	35.00	38.50	42.00	45.50	49.00	52.50	56.00	59.50	63.00

 东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Ran.)	
	150~	±1.5
型号 (Type): FPS1.5-XX-350-27M-YY	60~150	±1.0
	30~60	±0.6
核准 (Approval):	6~30	±0.4
	0~6	±0.2
核审 (Audit):	角度 (Angle) X	±2°
	单位 (Units):mm	X.X
设计 (Design):	比例 (Scale):FULL	 版次 (Version):1