
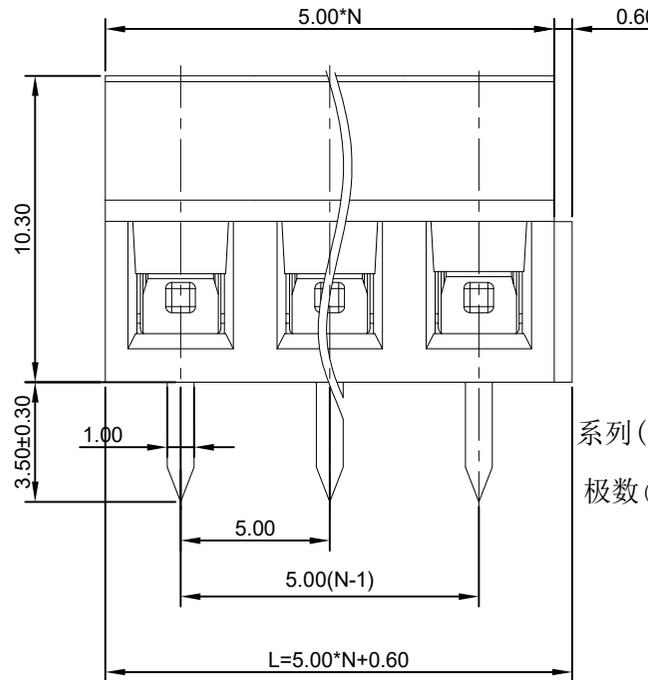
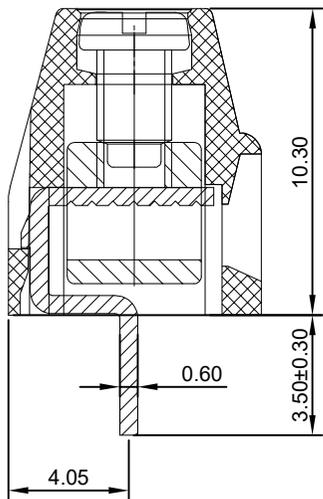
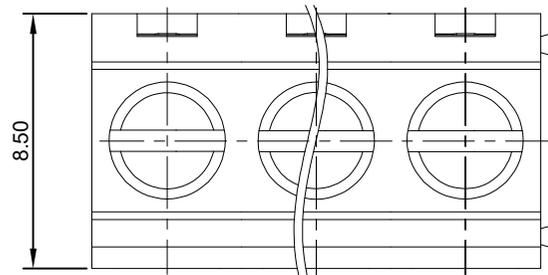


| | | |
|-----------------|------------------------|------------------------|
| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
| | | |
| | | |

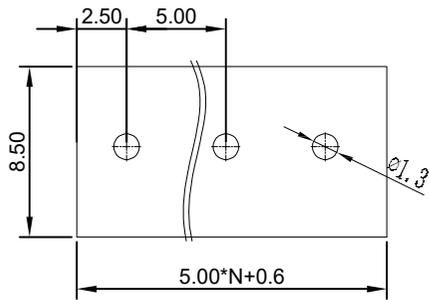

| 技术参数 (Technical Data) | | | | |
|------------------------------|---|-----------------------------------|-------------|-------------|
| UL | 应用组别(Use group) | B | C | D |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/12A | 300V/12A | 300V/12A |
| | 过压类别 (Overvoltage Category) /污染等级 (Pollution Degree) | III/3 | III/2 | III/2 |
| IEC | 额定电器参数 (Rated Electrical Parameters) | 450V/17.50A | 450V/17.50A | 450V/17.50A |
| 压线范围(Wire Range) | | 26~14AWG 1.5mm ² | | |
| 工频耐压(Frequency Voltage) | | AC 2000V | | |
| 冲击耐压(Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗 (Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | | ≤8mΩ | | |
| 剥线长度(String Length) | | 6 (mm) | | |
| 工作温度(Temperature) | | -40° C~+105° C | | |
| 额定扭矩(Rated torque) | | M2.5/0.4N.m | | |
| 材质和电镀(Material and plating) | | | | |
| 绝缘材质(Housing) | | PA66(UL94 V-0) | | |
| 导体材料(Contact) | | 铜合金, 镀锡(Copper alloy, Sn plisted) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FET1.5-XX-500-04-YY

系列(Series) ————
极数(NO. of poles) ————
端子间距(Pitch) ————
型号(Model) ————
塑体颜色(Housing Color) ————

- | | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=5.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

| N | 02P | 03P | 04P | 05P | 06P | 07P | 08P | 09P | 10P | 11P | 12P | 13P |
|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|-------|
| L | 10.60 | 15.60 | 20.60 | 25.60 | 30.60 | 35.60 | 40.60 | 45.60 | 50.60 | 55.60 | 60.60 | 65.60 |
| B | 5.00 | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00 | 40.00 | 45.00 | 50.00 | 55.00 | 60.00 |
| N | 14P | 15P | 16P | 17P | 18P | 19P | 20P | 21P | 22P | 23P | 24P | |
| L | 70.60 | 75.60 | 80.60 | 85.60 | 90.60 | 95.60 | 100.60 | 105.60 | 110.60 | 115.60 | 120.60 | |
| B | 65.00 | 70.00 | 75.00 | 80.00 | 85.00 | 90.00 | 95.00 | 100.00 | 105.00 | 110.00 | 115.00 | |

| | | |
|---|-----------------------|---------------|
|  东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD | 公差范围(Tolerance Range) | |
| | 150~ | ±1.50 |
| 型号(Type): FET1.5-XX-500-04-YY | 60~150 | ±1.00 |
| | 30~60 | ±0.60 |
| 核准(Approval): | 6~30 | ±0.40 |
| | 0~6 | ±0.25 |
| 核审(Audit): | 角度 X | ±2° |
| | 单位(Units):mm | 页码(Page):1/1 |
| 设计(Design) | 比例(Scale):FULL | 版次(Versio):T0 |
| | | |