


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

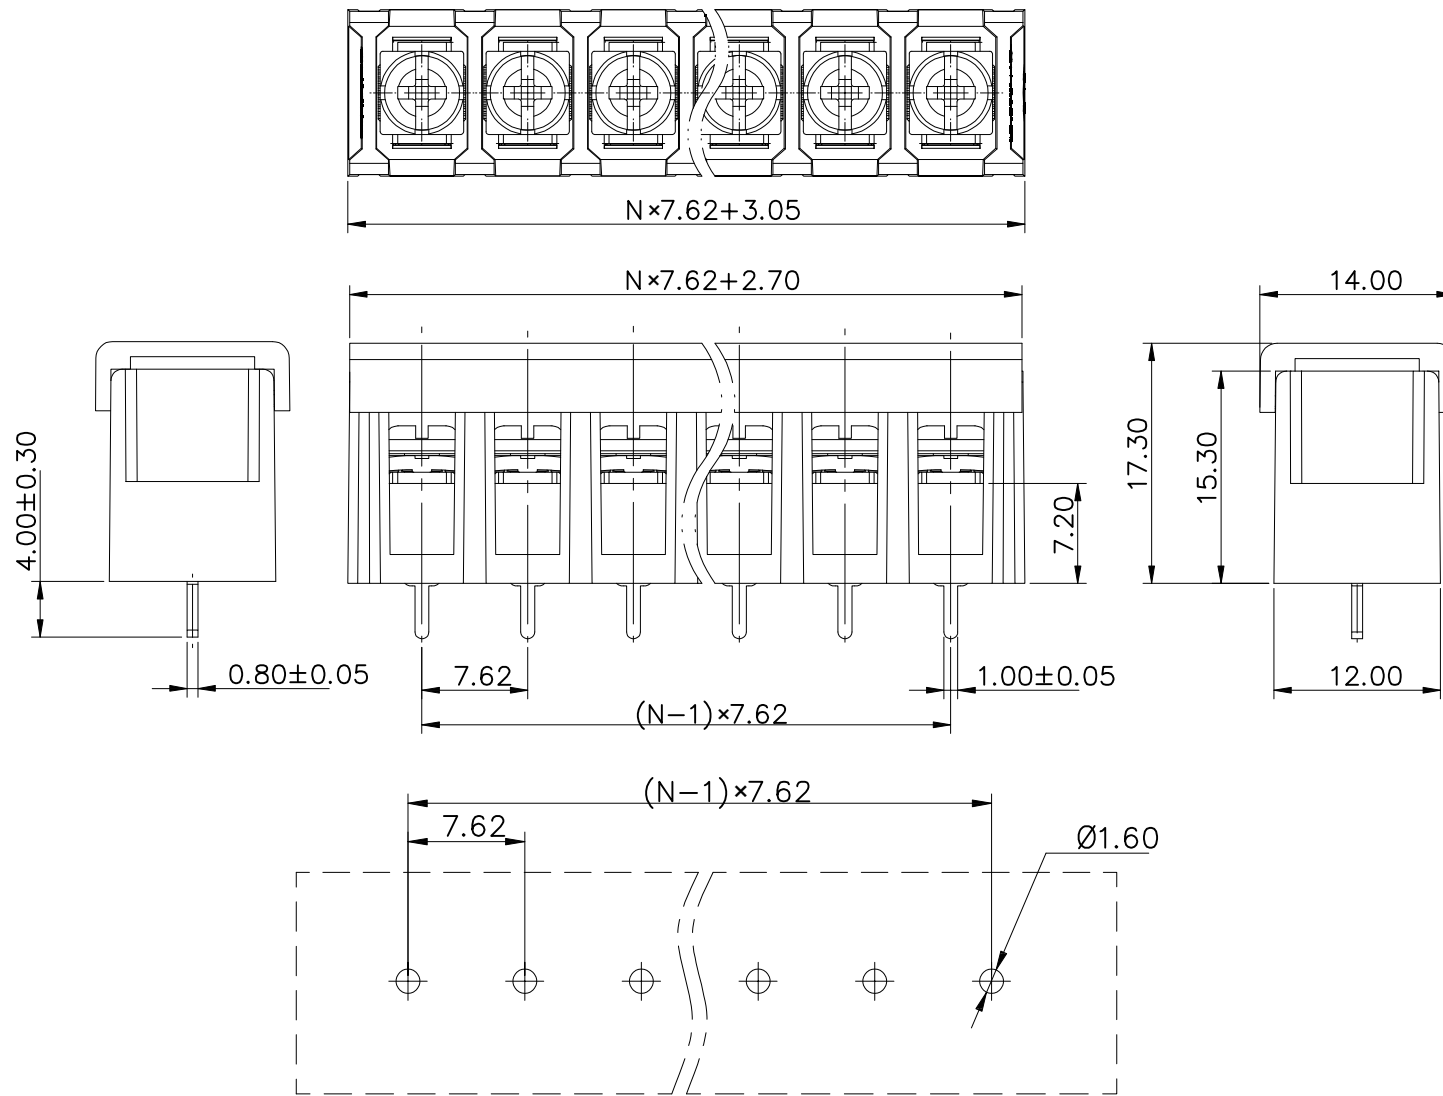

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	150V/15A	300V/15A
IEC	过压类别(Overvoltage Category)	III/3	III/2	II/2
	/污染等级(Pollution Degree)			
IEC	额定电器参数 (Rated Electrical Parameters)	300V/24A	300V/24A	300V/24A
	压线范围(Wire Range)	22~14AWG		
工频耐压(Frequency Voltage)		/		
冲击耐压(Rated Surge Voltage)		/		
绝缘阻抗(Insulation Resistance)		/		
接触电阻(Contact Resistance)		/		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		M3/0.5		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:  
(Product Number Code):

**BT2.5-XX-762-28S-YY**


系列(Series) 极数(NO. of poles) 型号(Model) 塑体颜色(Housing Color)

端子间距(Pitch)

- |              |                     |
|--------------|---------------------|
| 1:绿色(Green)  | 7:透明色(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)         |
| 3:黑色(Black)  | 9:黄色(Yellow)        |
| 4:灰色(Grey)   | Y:多种颜色(Mixed color) |
| 5:橙色(Orange) |                     |
| 6:红色(Red)    |                     |

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	18.29	25.91	33.53	41.15	48.77	56.39	64.01	71.63	79.25	86.87	94.49	102.11
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	109.73	117.35	124.97	132.59	140.21	147.83	155.45	163.07	170.69	178.31	185.93	
B	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

 <b>东莞市奥斯电子有限公司</b> <b>DONGGUAN AOSI ELECTRONICS CO., LTD.</b>	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): <b>BT2.5-XX-762-28S-YY</b>	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度(Angle)	X ±2°
	单位(Units):mm	XX ±1°
设计(Design)	比例(Scale):FULL	版次(Version):T0
	