


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

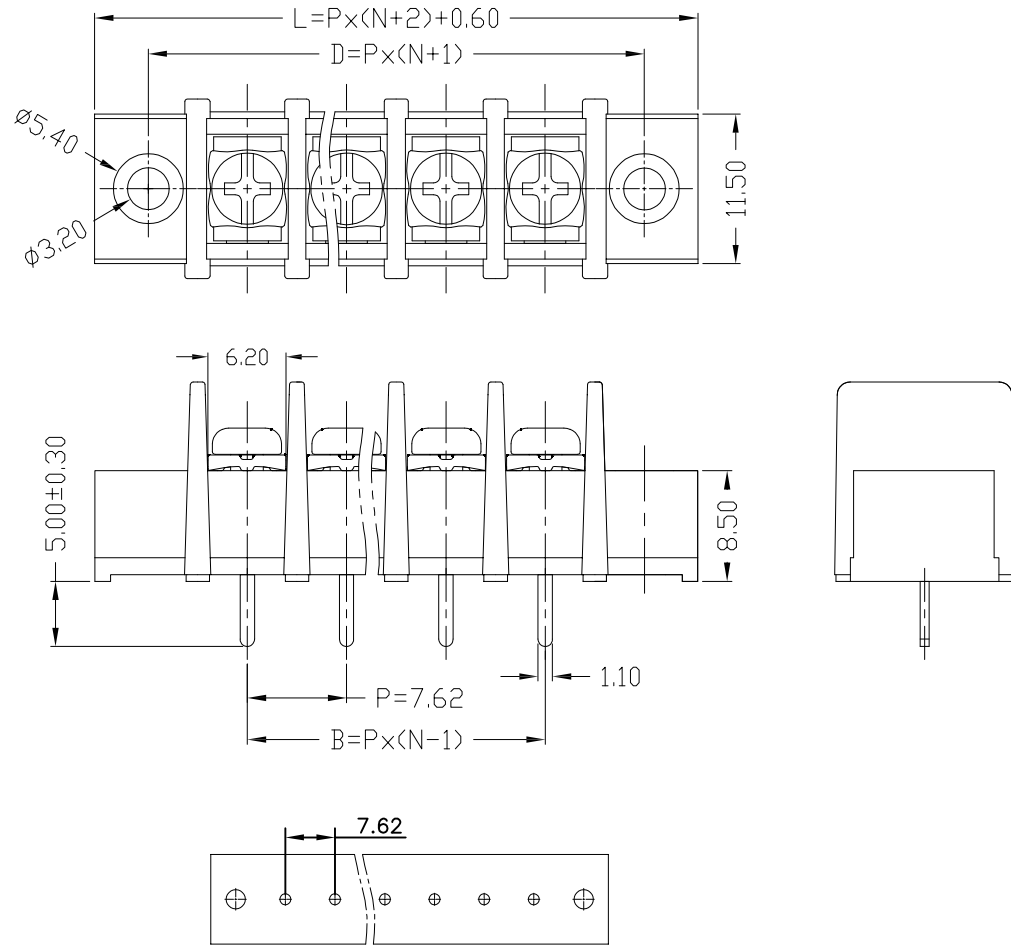

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	II/2
	额定电器参数 (Rated Electrical Parameters)	320V/24A	320V/24A	320V/24A
压线范围(Wire Range)		22~14AWG 2.5mm ²		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤8mΩ		
剥线长度(String Length)		6~7 (mm)		
工作温度(Temperature)		-40° C ~ +105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 (UL94 V-0)		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):

BT2.5-XX-762-25CM-YY

系列 (Series) | 极数 (NO. of poles) | 端子间距 (Pitch) | 型号 (Model) | 塑体颜色 (Housing Color)

1: 绿色 (Green)	7: 透明色 (Transparent)
2: 蓝色 (Blue)	8: 白色 (White)
3: 黑色 (Black)	9: 黄色 (Yellow)
4: 灰色 (Grey)	Y: 多种颜色 (Mixed color)
5: 橙色 (Orange)	
6: 红色 (Red)	

P=7.62mm, N为孔位数(N for hole digits), 有效位数为 (Significant Digits): 02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	31.08	38.70	46.32	53.94	61.56	69.18	76.80	84.42	92.04	99.66	107.28	114.90
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	112.52	130.14	137.76	145.38	153.00	160.62	168.24	175.86	183.48	191.10	198.72	
B	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD	公差范围 (Tolerance Range)	
	150~	±1.50
型号 (Type): BT2.5-XX-762-25CM-YY	60~150	±1.00
	30~60	±0.60
核准 (Approval):	6~30	±0.40
	0~6	±0.25
核审 (Audit):	角度 (Angle) X	±2°
	单位 (Units): mm	X.X
设计 (Design)	页码 (Page): 1/1	版次 (Version): T0
	比例 (Scale): FULL	