


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

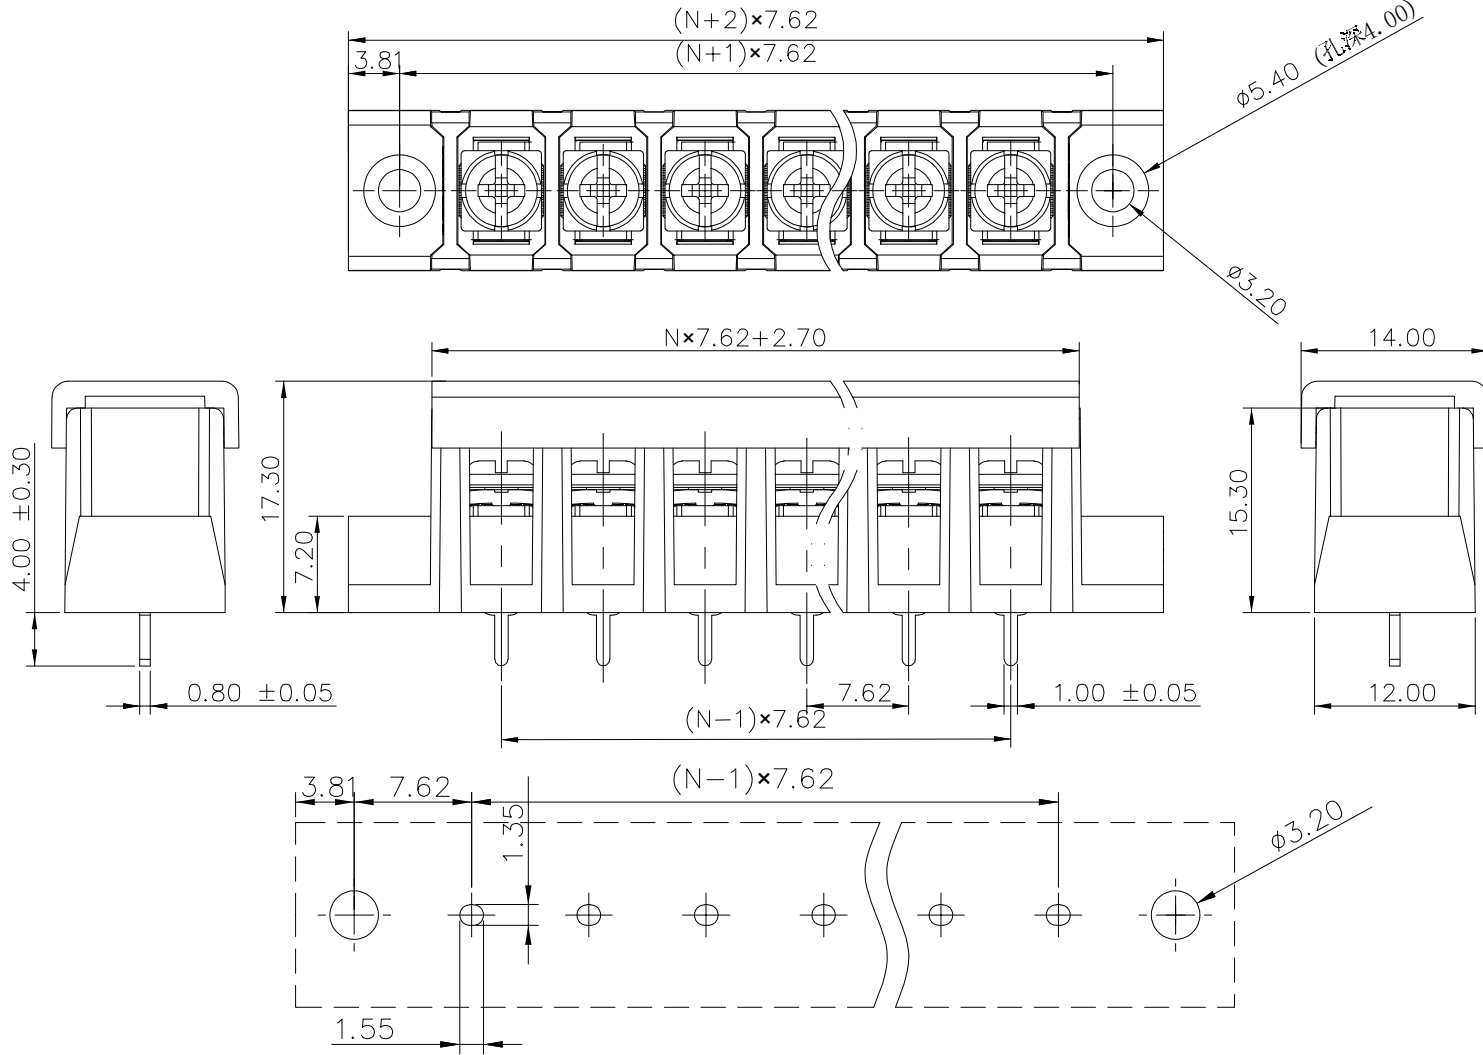

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	150V/15A	300V/10A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	II/2
	额定电器参数 (Rated Electrical Parameters)	300V/24A	300V/24A	300V/24A
压线范围(Wire Range)		22~14AWG		
工频耐压(Frequency Voltage)		/		
冲击耐压(Rated Surge Voltage)		/		
绝缘阻抗(Insulation Resistance)		/		
接触电阻(Contact Resistance)		/		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		M3/0.5		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 (UL94 V-0)		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):

BT2.5-XX-762-28CM-YY

极数 (NO. of poles)	型号 (Model)												
端子间距 (Pitch)	塑体颜色 (Housing Color)												
	<table border="0"> <tr> <td>1:绿色(Green)</td> <td>7:透明色 (Transparent)</td> </tr> <tr> <td>2:蓝色(Blue)</td> <td>8:白色(White)</td> </tr> <tr> <td>3:黑色(Black)</td> <td>9:黄色(Yellow)</td> </tr> <tr> <td>4:灰色(Grey)</td> <td>Y:多种颜色 (Mixed color)</td> </tr> <tr> <td>5:橙色(Orange)</td> <td></td> </tr> <tr> <td>6:红色(Red)</td> <td></td> </tr> </table>	1:绿色(Green)	7:透明色 (Transparent)	2:蓝色(Blue)	8:白色(White)	3:黑色(Black)	9:黄色(Yellow)	4:灰色(Grey)	Y:多种颜色 (Mixed color)	5:橙色(Orange)		6:红色(Red)	
1:绿色(Green)	7:透明色 (Transparent)												
2:蓝色(Blue)	8:白色(White)												
3:黑色(Black)	9:黄色(Yellow)												
4:灰色(Grey)	Y:多种颜色 (Mixed color)												
5:橙色(Orange)													
6:红色(Red)													

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	182.88	190.50	198.12	
B	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): BT2.5-XX-762-28CM-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	图号(Drawing NO.):	0~6
核审(Audit):	角度(Angle)	X ±2°
	单位(Units):mm	X.X ±1°
设计(Design)	页码(Page):1/1	
	比例(Scale):FULL	版次(Version):T0