
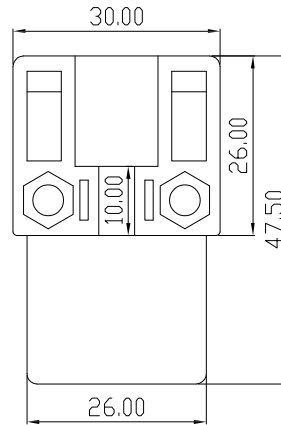
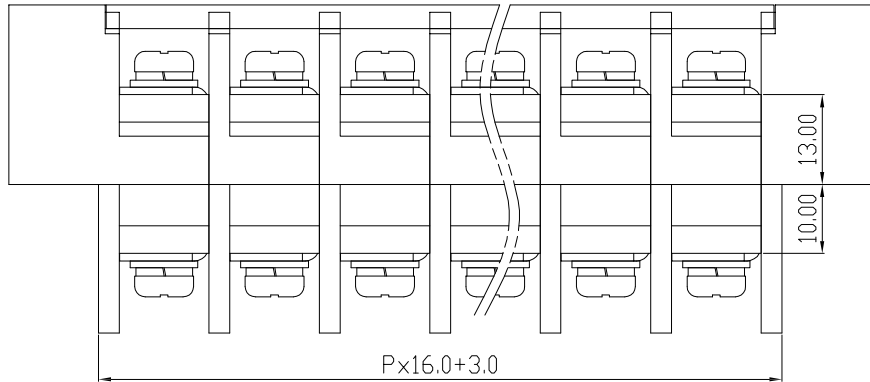
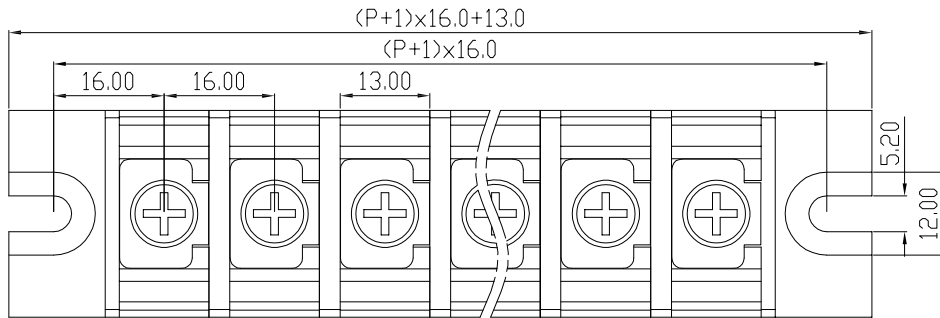


| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |

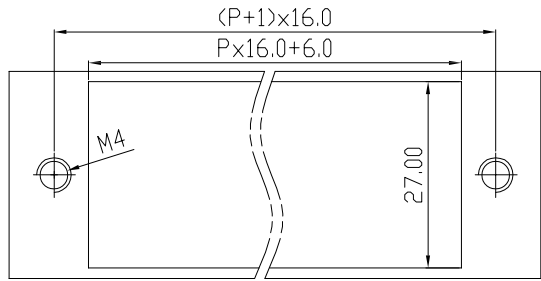

| 技术参数 (Technical Data)       |   |                                  |       |      |
|-----------------------------|---|----------------------------------|-------|------|
| UL                          | 应用组别(Use group)                                       | B                                | C     | D    |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 600V/65A                         | /     | /    |
| IEC                         | 过压类别(Overvoltage Category)<br>/污染等级(Pollution Degree) | III/3                            | III/2 | II/2 |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | /                                | /     | /    |
| 压线范围(Wire Range)            |   | 14~6AWG 16.0mm <sup>2</sup>      |       |      |
| 工频耐压(Frequency Voltage)     |   | AC 1000V                         |       |      |
| 冲击耐压(Rated Surge Voltage)   |   | /                                |       |      |
| 绝缘阻抗(Insulation Resistance) |   | /                                |       |      |
| 接触电阻(Contact Resistance)    |   | /                                |       |      |
| 剥线长度(String Length)         |   | /                                |       |      |
| 工作温度(Temperature)           |   | -30° C~+120° C                   |       |      |
| 额定扭矩(Rated torque)          |   | /                                |       |      |
| 材质和电镀(Material and plating) |   |                                  |       |      |
| 绝缘材质(Housing)               |   | PA66                             |       |      |
| 导体材料(Contact)               |   | 铜合金, 镀锡(Copper alloy, Sn plated) |       |      |
| /                           |   | /                                |       |      |

产品命名编码:  
(Product Number Code):

JFF10C-1600-YY

系列(Series)



端子间距(Pitch)

塑体颜色(Housing Color)

- |              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=16.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

| N | 02P    | 03P    | 04P    | 05P    | 06P    | 07P    | 08P    | 09P    | 10P    | 11P    | 12P    | 13P    |
|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| L | 61.00  | 77.00  | 93.00  | 109.00 | 125.00 | 141.00 | 157.00 | 173.00 | 189.00 | 205.00 | 221.00 | 237.00 |
| B | 16.00  | 32.00  | 48.00  | 64.00  | 80.00  | 96.00  | 112.00 | 128.00 | 144.00 | 160.00 | 176.00 | 192.00 |
| N | 14P    | 15P    | 16P    | 17P    | 18P    | 19P    | 20P    | 21P    | 22P    | 23P    | 24P    |        |
| L | 253.00 | 269.00 | 285.00 | 301.00 | 317.00 | 333.00 | 349.00 | 365.00 | 381.00 | 397.00 | 413.00 |        |
| B | 208.00 | 224.00 | 240.00 | 256.00 | 272.00 | 288.00 | 304.00 | 320.00 | 336.00 | 352.00 | 368.00 |        |

|  |   |                |
|--|---|----------------|
|  <b>东莞市澳斯电子有限公司</b><br><b>DONGGUAN AOSI ELECTRONICS CO., LTD.</b> | 公差范围(Tolerance Range)   |                |
|  | 150~  | ±1.50          |
| 型号(Type): JFF10C-1600-YY   | 60~150  | ±1.00          |
|  | 30~60   | ±0.60          |
| 核准(Approval):  | 6~30  | ±0.40          |
|  | 0~6   | ±0.25          |
| 核审(Audit):   | 角度(Angle)   | X ±2°          |
|  | 单位(Units):mm  | 页码(Page):1/1   |
| 设计(Design)   | 比例(Scale):FULL  | 版次(Version):T0 |
|  |  |                |