




东莞市澳斯电子有限公司

DongGuan AOSI Electronics Co.,Ltd

产品规格书

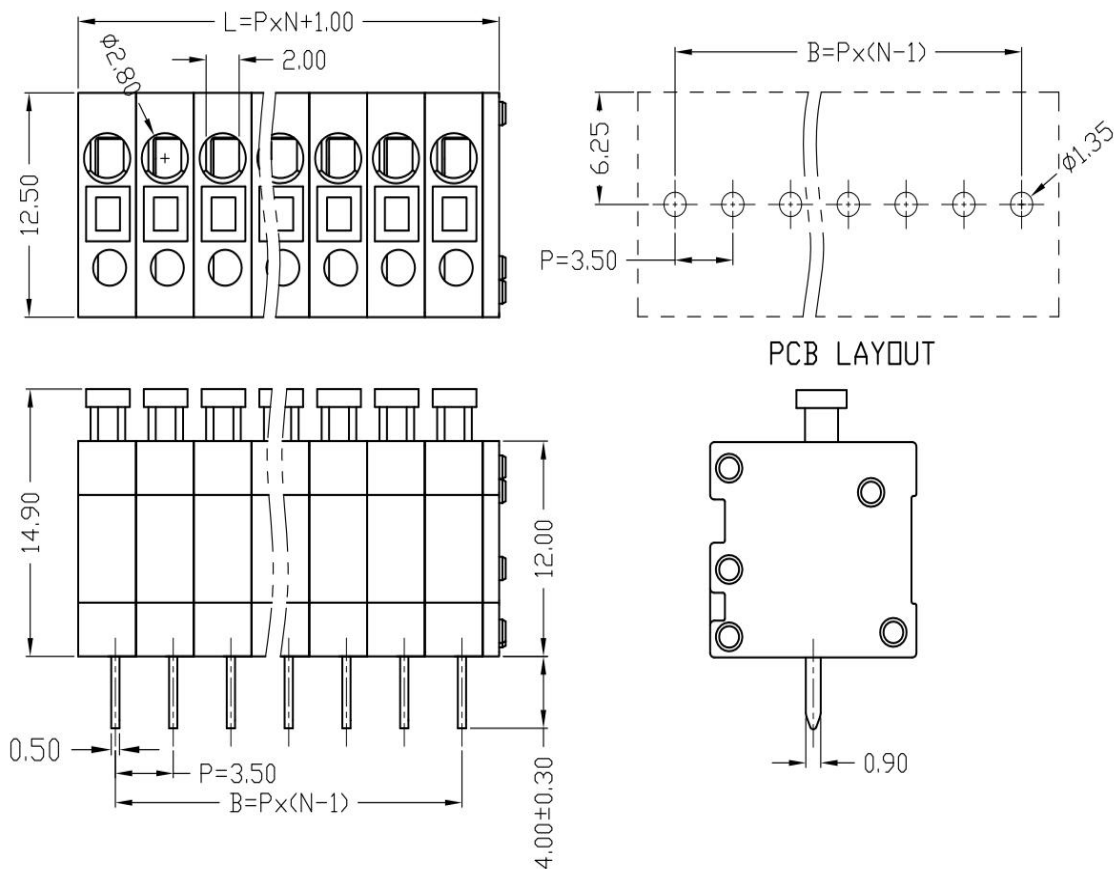

认证



电气性能/Electrical

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	8A	10A
使用线径/Wire range	26-16AWG	1.0mm ²
耐电压/Withstanding voltage	AC2000V/Min	

机械性能/Mechanical

剥线长度/Strip length	8.0-9.0mm
温度范围/Temp range	-40°C +105°C
瞬间温度/Max soldering	+250°C 5scc

尺寸/Dimensions

间距/Pitch	3.5mm
极数/Poles	2-36P

材质及电镀/Material

塑件/Housing	PA66 UL94-V0
焊脚/Pin header	铜合金 镀锡/Copper alloy, Tin plated
弹片/Shrapnel	不锈钢/Stainless steel

	Pitch dimension			Nominal dimension				Tolerance
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	
variable range	±0.15	±0.25	±0.25	±0.20	±0.3	±0.5	±0.7	±1
Tolerance	±0.1	±0.15	±0.25	±0.20	±0.3	±0.5	±0.7	±1

单位: mm NAME: FS1.5-XX-350-02

第三视角



东莞市澳斯电子有限公司
DongGuan AOSI Electronics Co.,Ltd