
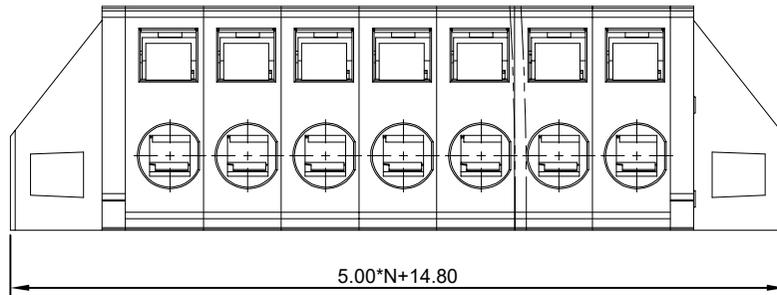
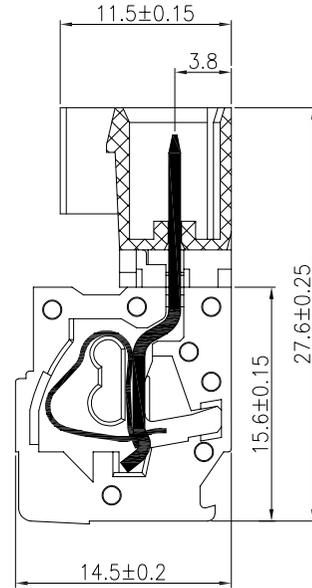


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

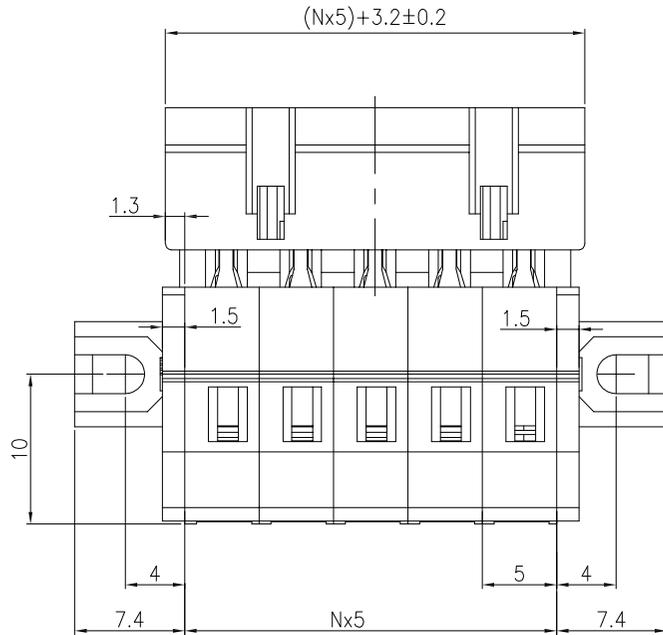

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
IEC	额定电器参数 (Rated Electrical Parameters)	300V/16A	/	/
	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	II/2
IEC	额定电器参数 (Rated Electrical Parameters)	450V/16A	400V/16A	/
	压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)		AC 2000V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plisted)		
/		/		

产品命名编码:
(Product Number Code):

FPM2.5-XX-500-24M-YY

系列 (Series)

极数 (NO. of poles)

端子间距 (Pitch)

型号 (Model)

塑体颜色 (Housing Color)

- | | |
|----------------|-----------------------|
| 1: 绿色 (Green) | 7: 透明色 (Transparent) |
| 2: 蓝色 (Blue) | 8: 白色 (White) |
| 3: 黑色 (Black) | 9: 黄色 (Yellow) |
| 4: 灰色 (Grey) | Y: 多种颜色 (Mixed color) |
| 5: 橙色 (Orange) | |
| 6: 红色 (Red) | |

P=5.00mm, N为孔位数(N for hole digits), 有效位数为 (Significant Digits): 02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	24.80	29.80	34.80	39.80	44.80	49.80	54.80	59.80	64.80	69.80	74.80	79.80
B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	84.80	89.80	94.80	99.80	104.80	109.80	114.80	119.80	124.80	129.80	134.80	
B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD		公差范围 (Tolerance Range)	
型号 (Type): FPM2.5-XX-500-24M-YY		150~	±1.50
		60~150	±1.00
核准 (Approval): 图号 (Drawing NO.):		30~60	±0.60
		6~30	±0.40
核审 (Audit): 单位 (Units): mm 页码 (Page): 1/1		0~6	±0.25
		角度 (Angle) X	±2°
设计 (Design) 比例 (Scale): FULL		角度 (Angle) X.X	±1°
		版次 (Version): T0	